

SPECIFICATIONS

Xthermostat™ TS 600




The TS 600 Xthermostat™ is an intuitive fully programmable semi-recessed thermostat. This semi-recessed, floor/ceiling and room sensing unit features a touch-screen interface and can be controlled from a smartphone using the Devex System app.

DESCRIPTION

- Programmable semi-recessed thermostat for controlling heating systems.
- Customisable 7-day timer programmable down to the minute.
- Floor or room sensing (or both)
- ON / OFF Main switch (on screen)
- Relay 16A
- Mounted horizontally
- Wifi

TECHNICAL FEATURES

Sensing Type	Air / Floor / Air-Floor
Mounting	Semi-recessed
Measuring accuracy	0.1°C
Operating temperature	0°C - 50°C
Setting temperature range	5°C - 35°C
Electrical protection	Class II - IP21
Main switch	Two poles 16A
Power supply	230Vac +/- 10% 50Hz
Output	Relay 16A 250Vac resistive load
Type of external sensor	NTC - 15 kOhms at 25°C

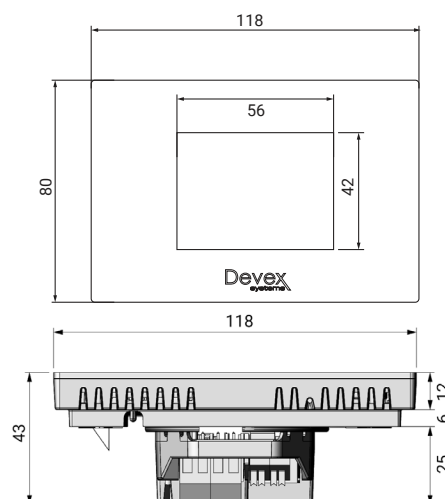

p: 1800 636 091 | e: info@devexsystems.com.au | w: www.devexsystems.com.au