INSTRUCTIONS TO BE KEPT BY THE USER OF THE APPLIANCE

SLIMLINE
RADIANT HEATING PANELS

NOT FOR HOUSEHOLD USE

LOW TEMPERATURE

SLIMLINE 350 W – SLIMLINE 750 W

INSTALLATION INSTRUCTIONS

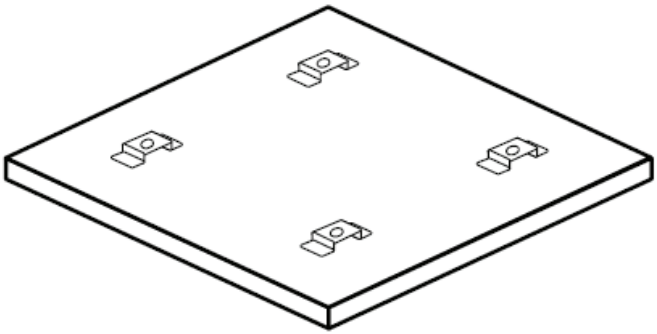

COMFORTLINE™

1. GENERAL INFORMATION

1.1. Panels are class I, with IP44. The IN version is IP65.

1.2. All heaters must be installed by a Licensed Electrician only in accordance with AS 3000 wiring rules.

1.3. It is very important not to touch the heating panels without gloves. Oil even from clean hand can mark the panels. It is not possible to remove grease or dirt marks without damage to the heating surface.

1.4. All materials in contact with the heating panel must have thermal tolerance > 60 °C.

2. MOUNTING OF PANELS

Panel may be mounted in the following manner

Direct attachment to ceiling

Suspension from the ceiling

Insertion into ceiling grid

N.B.: The following clearances are recommended.

h (min) 2.4 m	
h = 2.4 -3 m	x = 0.60 m
h = 3.5 m	x = 1.20 m
h > 4 m	x = 1.80 m

* We do not recommend mounting heights higher than 3.5 m

2.1. DIRECT ATTACHMENT TO CEILING

The fixing frame supplied with the heater is

Attached to the ceiling using screws.

See ilustrations.

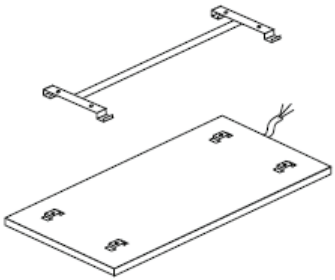

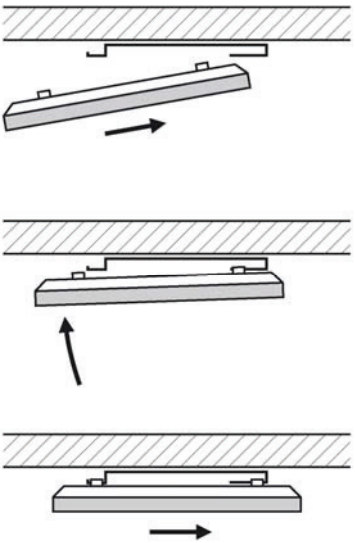

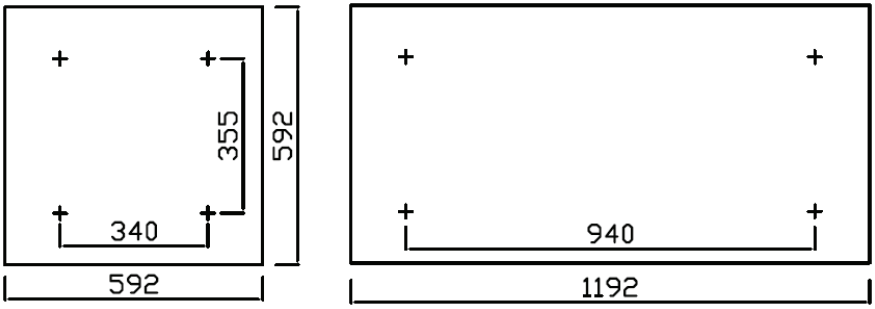

2.2. SUSPENDED PANELS

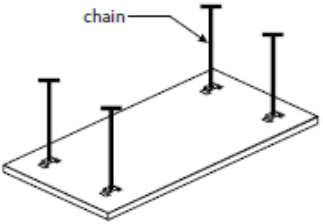

- There are four fixing points on the rear of the panel to enable chain suspension. Minimum diameter of zinc plated steel chain 2.5 mm, maximum chain length 1.5 m.

2.3. INSERTION INTO CEILING GRID

- Panels are inserted into a suspended ceiling construction.

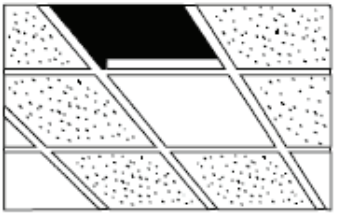

3. CONNECTION

3.1. Supply voltage 240 V ~ single phase
3.2. Panel is supplied with a 3 core cable, cross section 1 mm^2 , length 1 m.

Phase – brown, neutral – blue, earth protection – yellow/green.

4. CONTROL

Temperature control of individual heated areas is by electronic air sensing thermostat.
Mounted at 1.5 m above floor level in a repesentative position.

NOTICE

Panels may only be connected by suitably qualified registered electricians.

5. TECHNICAL CHARACTERISTICS

TYPE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	OUTPUT (W)	VOLTAGE (V)	IP	WEIGHT (kg)
350	592	592	35	350	240	44	5.9
650	1192	592	35	650	240	44	10.5
750	1192	592	35	750	240	44	10.5
750 IN	1192	592	35	750	240	65	11.5

6. NOTICE

It is very important not to touch the heating panels without gloves as it is not possible to remove grease or dirt marks without damage to the heating surfaces.

7. GUARANTEE CONDITIONS

The following Warranty provided by Devex Systems ABN 39 898 434 262, is offered in addition to any relevant statutory Federal or State Warranty. Devex Systems warrants the Slimline Radiant Heating Panels for a period of 2 years. Devex Systems warrants its product against defects in material, manufacture, or workmanship. Proof of purchase must be provided. Installations must be carried out in accordance with the instructions supplied and must be installed by a licensed electrician. An authorised Devex Systems representative must be given the opportunity to inspect and report on the defect. The obligation of Devex Systems is to repair or replace the defective product only free of charge to the customer. The faulty product must be returned to the place of purchase, or to Devex Systems, where Devex Systems reserves the right to repair or replace the unit at no cost within a reasonable period of time. This Warranty does not cover faults caused by incorrect installation, damage by others, misuse, lightning, or, incorrect design by others or where payment is in default. Rectification work, performed as a consequence of matters not covered by the Warranty, or on an installation, will be at the expense of the customer. The Warranty is void, if payment of the equipment is in default. At all times, we at Devex Systems will respond honestly, efficiently and promptly to all queries and reasonable requests from our customers.

COMFORTLINE™

Head Office

Telephone (02) 9997 2811
Facsimile (02) 9997 7852
Freecall 1 800 636 091

Victorian Office

Telephone (03) 5986 7388
Facsimile (03) 5986 7399

Tasmanian Office

Telephone (03) 6273 9122
Facsimile (03) 6273 9120