



5/83 Bassett Street
MONA VALE NSW 2103
PO Box 707
MONA VALE NSW 1660
Phone: 1800 636 091
Fax: 02 9997 7852
email: info@devexsystems.com.au
www.devexsystems.com.au

Setup Guide

X Thermostat TS600

Wifi Programmable Thermostat




TS600 can be mounted horizontally or vertically
TS600 is available in white and black

Table of Contents

Included in the box	1
Installer Guide	2
Technical specifications	2
Dimensions	2
Mounting Instructions.....	3
User Guide	4
TS 600 setup	4
Home screen information	5
Timer setup	6

Included in the box



X Thermostat TS 600




3m 15 kOhms NTC sensor

Installer Guide


Technical Specifications

Sensing Type	Air / Floor / Air-Floor
Mounting	Semi-Recessed
Measuring accuracy	0.1°C
Operating temperature	0°C - 50°C
Setting temperature range	5°C - 35°C
Electrical protection	Class II - IP20
Main switch	Two poles 16A
Power supply	230Vac +/- 10% 50Hz
Output	Relay 16A 250Vac resistive load
Type of external sensor	NTC - 15 kOhms at 25°C


Dimensions

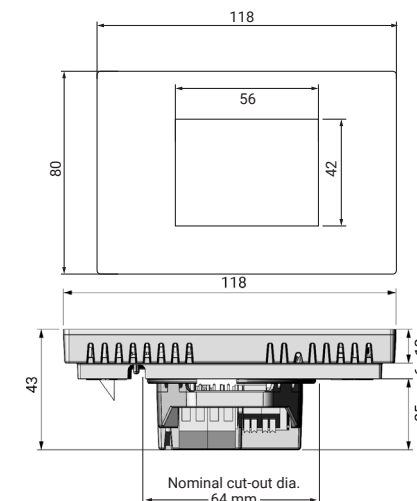

Mounting Instructions

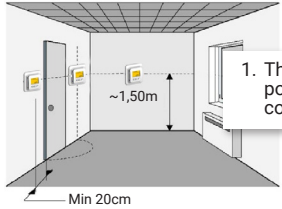


1. Thermostat should be positioned within these constraints

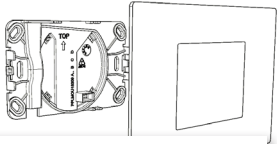

2. Cut 64mm hole into wall and insert C-clip or plaster hook if stud bracket not already pre-installed.


3. Wire the thermostat according to this wiring diagram

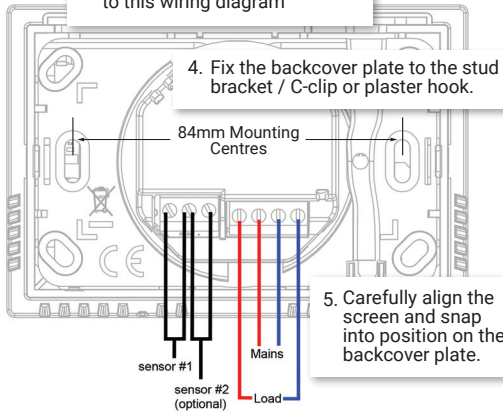

4. Fix the backcover plate to the stud bracket / C-clip or plaster hook.


5. Carefully align the screen and snap into position on the backcover plate.

Home screen information

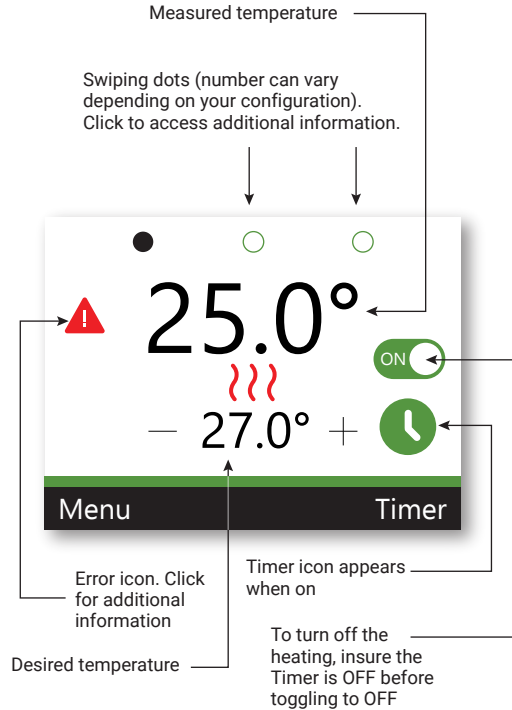

Note: The thermostat cannot be mechanically switched off. However, it will consume minimal electricity in sleep mode.

Timer setup

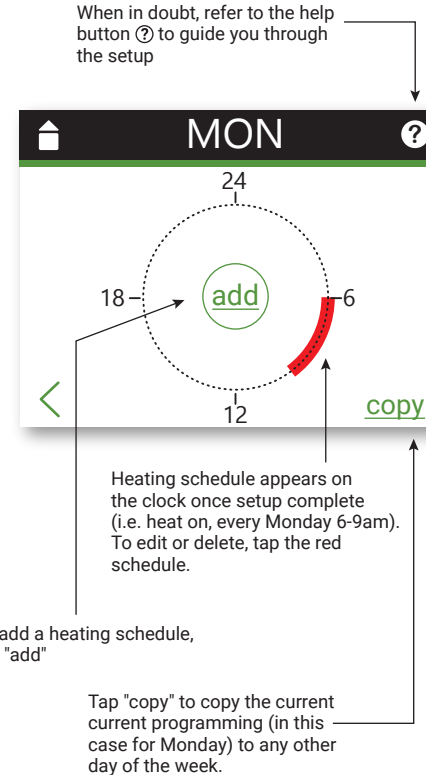

User Guide

TS 600 Setup

The installation wizard will give you step by step instructions.

